


Firewall® SR

Instrumentation Cable

Multi-Shielded Pairs Without Overall Shield (Silicone Rubber)

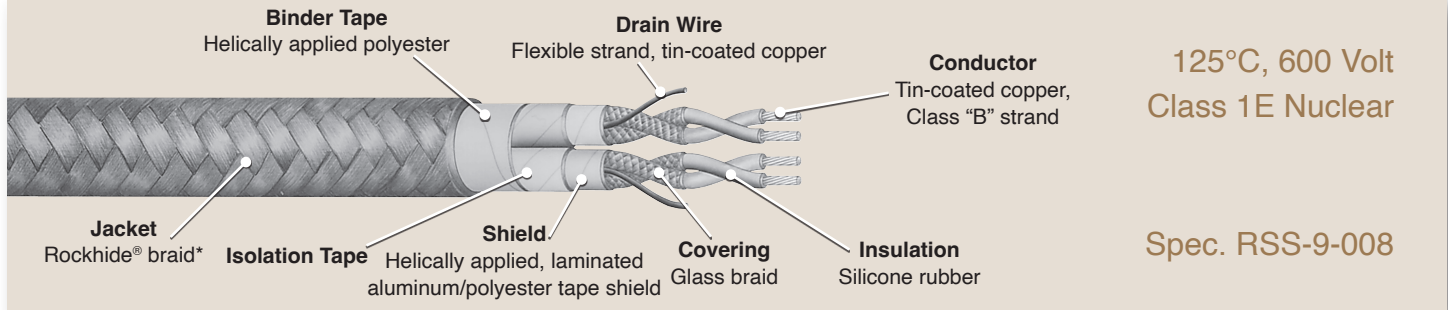

125°C, 600 Volt
Class 1E Nuclear

Spec. RSS-9-008

Features

- Nuclear qualified with a minimum 40-year thermal life expectancy at 125°C
- Radiation resistant (up to 200 megarads)
- Extremely flame retardant
- Extremely flexible for installation ease
- Excellent circuit integrity during flame conditions
- Full traceability
- Easy strippability for termination ease
- Tin-coated copper conductors for improved terminations, corrosion resistance and temperature endurance
- All singles pass a wet dielectric (tank) test prior to braid covering to verify electrical integrity
- Shield to shield isolation system provided and verified by electrical testing
- All cables have printed sequential footage markers for improved inventory control

Scope

Firewall® SR Instrumentation Cable is a silicone rubber insulated construction specifically designed for high temperature applications within nuclear generating facilities. It is intended for use in harsh and demanding environments where temperature extremes preclude the use of standard cables. It may be installed in trays, ducts, conduits or in confined spaces such as equipment housings. *Designed for use on circuits where shielding over individual pairs is required but additional overall shielding is not critical.*

Performance Standards

- Silicone rubber insulation in accordance with ICEA S-19-81
- Class 1E qualified in accordance with IEEE 383-1974 and IEEE 323-1974 (RSCC Report QR-8802)
- Cable passes IEEE 383-1974 70,000 BTU/hr vertical tray flame test as modified by NRC Reg. Guide 1.131
- Cable passes ICEA T-29-520 210,000 BTU/hr vertical tray flame test
- Single conductors pass the vertical flame test specified in IEEE 383-1974 para. 2.5.6 (ICEA S-19-81 Section 6.19.6)
- Quality Assurance program in accordance with 10 CFR 50 Appendix B

Construction

Conductor: Annealed, tin-coated copper, Class "B" strand (ASTM B8 & B33)

Insulation: Proprietary heat, moisture and radiation resistant silicone rubber

Covering: Glass braid with high temperature finish

Pair Assembly: Two insulated and braided conductors twisted with a flexible strand, tin-coated copper drain wire, a helically applied aluminum/polyester laminated tape shield and an isolation tape

Cabling: Required number of pairs cabled together

Circuit Identification: One leg of each pair is white. Up to 5 pairs, second legs are black, red, green, orange, or blue. Over 5 pairs, legs are white and black with printed pair number on each leg of each pair.

Fillers: As applicable

Binder Tape: Helically applied polyester

Overall Covering: Rockhide® braid* with high temperature finish

* Rockhide® is a proprietary blend of aramid and other high temperature synthetic fibers.



Made in the USA



Marmon Electrical
A Berkshire Hathaway Company

Firewall® SR Instrumentation Cable

Multi-Shielded Pairs Without Overall Shield (Silicone Rubber)



125°C, 600 Volt
Class 1E Nuclear

Spec. RSS-9-008

16 AWG, 7 Strand

Product Code	Number of Pairs	Insulation Thickness (inch)	Insulation Thickness (mm)	Individual Braid Thickness (Mils)	Single Conductor Diameter (inch)	Drain Wire Size/Stranding	Overall Braid Thickness (Mils)	Nominal Overall Diameter (inch)	Nominal Overall Diameter (mm)	Approximate Net Weight (Lbs/M')
I48-3371	2	.030	.76	7.5	.14	18 AWG (16/s)	40	.61	15.49	120
I48-3372	3	.030	.76	7.5	.14	18 AWG (16/s)	40	.65	16.51	160
I48-3373	4	.030	.76	7.5	.14	18 AWG (16/s)	40	.72	18.29	205
I48-3374	5	.030	.76	7.5	.14	18 AWG (16/s)	40	.79	20.07	255
I48-3375	7	.030	.76	7.5	.14	18 AWG (16/s)	40	.87	22.10	335
I48-3376	9	.030	.76	7.5	.14	18 AWG (16/s)	40	1.03	26.16	455
I48-3377	12	.030	.76	7.5	.14	18 AWG (16/s)	40	1.17	29.72	540
I48-3378	15	.030	.76	7.5	.14	18 AWG (16/s)	40	1.31	33.27	685
I48-3379	19	.030	.76	7.5	.14	18 AWG (16/s)	40	1.39	35.31	845
I48-3380	37	.030	.76	7.5	.14	18 AWG (16/s)	40	1.98	50.29	1570

18 AWG, 7 Strand

Product Code	Number of Pairs	Insulation Thickness (inch)	Insulation Thickness (mm)	Individual Braid Thickness (Mils)	Single Conductor Diameter (inch)	Drain Wire Size/Stranding	Overall Braid Thickness (Mils)	Nominal Overall Diameter (inch)	Nominal Overall Diameter (mm)	Approximate Net Weight (Lbs/M')
I48-3381	2	.030	.76	7.5	.13	20 AWG (10/s)	40	.56	14.22	95
I48-3382	3	.030	.76	7.5	.13	20 AWG (10/s)	40	.60	15.24	125
I48-3383	4	.030	.76	7.5	.13	20 AWG (10/s)	40	.66	16.76	160
I48-3384	5	.030	.76	7.5	.13	20 AWG (10/s)	40	.73	18.54	200
I48-3385	7	.030	.76	7.5	.13	20 AWG (10/s)	40	.80	20.32	260
I48-3386	9	.030	.76	7.5	.13	20 AWG (10/s)	40	.95	24.13	340
I48-3387	12	.030	.76	7.5	.13	20 AWG (10/s)	40	1.08	27.43	415
I48-3388	15	.030	.76	7.5	.13	20 AWG (10/s)	40	1.21	30.73	525
I48-3389	19	.030	.76	7.5	.13	20 AWG (10/s)	40	1.28	32.51	540
I48-3390	37	.030	.76	7.5	.13	20 AWG (10/s)	40	1.82	46.23	1180



Made in the USA



Marmon Electrical
A Berkshire Hathaway Company